

# N9030B PXA X-Series Signal Analyzer, Multi-touch

2 Hz to 3.6, 8.4, 13.6, 26.5, 44, or 50 GHz



## Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply to temperature ranges 0 to 55 °C, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx. 2s) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered by the product warranty.

The analyzer will meet its specifications when:

- The analyzer is within its calibration cycle.
- Under auto couple control, except that Auto Sweep Time Rules = Accy.
- For signal frequencies < 10 MHz, DC coupling applied.
- The analyzer has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on, if it had previously been stored at a temperature range inside the allowed storage range but outside the allowed operating range.
- The analyzer has been turned on at least 30 minutes with Auto Align set to Normal, or if Auto Align is set to Off or Partial, alignments must have been run recently enough to prevent an Alert message. If the Alert condition is changed from “Time and Temperature” to one of the disabled duration choices, the analyzer may fail to meet specifications without informing the user. If Auto Align is set to Light, performance is not warranted, and nominal performance will degrade to become a factor of 1.4 wider for any specification subject to alignment, such as amplitude tolerances.

The term “mixer level” is used as a condition for many specifications in this document. This term is a conceptual quantity that is defined as follows: Mixer Level (dBm) = RF Input Power Level (dBm) - (Electronic + Mechanical) Attenuation (dBm).

## Accelerate signal insight with outstanding all-around signal analysis

The PXA is the benchmark for performance that accelerates innovation in demanding applications. With measurement options that range from excellent to exceptional, the PXA puts you in the lead.

Analyze the latest signals with up to 510 MHz analysis bandwidth and better than 78 dBc SFDR, and reveal previously hidden signals with Noise Floor Extension (NFE). To see your device’s true behavior, get industry-leading phase noise performance by adding the Keysight-proprietary DDS-based LO.

Simplify migration from legacy Agilent/HP spectrum analyzers with backward code compatibility and compact 4U form-factor

This data sheet is a summary of the specifications and conditions for PXA signal analyzers. For the complete specifications guide, visit: [www.keysight.com/find/pxa\\_specifications](http://www.keysight.com/find/pxa_specifications)

## Frequency and Time Specifications

Frequency range		DC coupled	AC coupled
Option 503		2 Hz to 3.6 GHz	10 MHz to 3.6 GHz
Option 508		2 Hz to 8.4 GHz	10 MHz to 8.4 GHz
Option 513		2 Hz to 13.6 GHz	10 MHz to 13.6 GHz
Option 526		2 Hz to 26.5 GHz	10 MHz to 26.5 GHz
Option 544		2 Hz to 44 GHz	NA
Option 550		2 Hz to 50 GHz	NA
Band	LO multiple (N)		
0	1	2 Hz to 3.6 GHz	
1	1	3.5 to 8.4 GHz	
2	2	8.3 to 13.6 GHz	
3	2	13.5 to 17.1 GHz	
4	4	17 to 26.5 GHz	
5	4	26.4 to 34.5 GHz	
6	8	34.4 to 50 GHz	
Precision frequency reference			
Accuracy		$\pm [(time\ since\ last\ adjustment\ \times\ aging\ rate) + temperature\ stability + calibration\ accuracy]$	
Aging rate		$\pm 1 \times 10^{-7} / year$	
		$\pm 1.5 \times 10^{-7} / 2\ years$	
Temperature stability			
– 20 to 30 °C		$\pm 1.5 \times 10^{-8}$	
– Full temperature range		$\pm 5 \times 10^{-8}$	
Achievable initial calibration accuracy		$\pm 4 \times 10^{-8}$	
Example frequency reference accuracy		$= \pm (1 \times 1 \times 10^{-7} + 1.5 \times 10^{-8} + 4 \times 10^{-8})$	
1 year after last adjustment 20 to 30 °C		$= \pm 1.55 \times 10^{-7}$	
Residual FM			
– Center frequency = 1 GHz		$\leq (0.25\ Hz \times N)\ p-p\ in\ 20\ ms\ nominal$	
– 10 Hz RBW, 10 Hz VBW		See band table above for N (LO multiple)	
Frequency reference (Option EP0)			
Accuracy		$\pm [(time\ since\ last\ adjustment\ \times\ aging\ rate) + temperature\ stability + calibration\ accuracy]$	
Aging rate		$\pm 3 \times 10^{-8} / year$	
Temperature stability			
– Full temperature range		$\pm 4.5 \times 10^{-9}$	
Achievable initial calibration accuracy		$\pm 3.1 \times 10^{-8}$	
Example frequency reference accuracy		$\pm (3 \times 10^{-8} + 4.5 \times 10^{-9} + 3.1 \times 10^{-8})$	
1 year after last adjustment		$= \pm 6.6 \times 10^{-8}$	
Residual FM			
– Center frequency = 1 GHz		$\leq (0.25\ Hz \times N)\ p-p\ in\ 20\ ms\ nominal$	
– 10 Hz RBW, 10 Hz VBW		See band table above for N (LO multiple)	
Frequency readout accuracy (start, stop, center, marker)			
$\pm (marker\ frequency \times frequency\ reference\ accuracy + 0.10\% \times span + 5\% \times RBW + 2\ Hz + 0.5 \times horizontal\ resolution\ ^1)$			
Marker frequency counter			
Accuracy		$\pm (marker\ frequency \times frequency\ reference\ accuracy + 0.100\ Hz)$	
Delta counter accuracy		$\pm (\delta\ frequency \times frequency\ reference\ accuracy + 0.141\ Hz)$	
Counter resolution		0.001 Hz	

1. Horizontal resolution is span/(sweep points –1).

## Frequency and Time Specifications (Continued)

<b>Frequency span (FFT and swept mode)</b>		
Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument	
Resolution	2 Hz	
Accuracy		
– Swept	$\pm (0.1\% \times \text{span} + \text{horizontal resolution})$	
– FFT	$\pm (0.1\% \times \text{span} + \text{horizontal resolution})$	
<b>Sweep time and triggering</b>		
Range	Span = 0 Hz	1 $\mu$ s to 6000 s
	Span $\geq$ 10 Hz	1 ms to 4000 s
Accuracy	Span $\geq$ 10 Hz, swept	$\pm 0.01\%$ nominal
	Span $\geq$ 10 Hz, FFT	$\pm 40\%$ nominal
	Span = 0 Hz	$\pm 0.01\%$ nominal
Sweep trigger	Free run, line, video, external 1, external 2, RF burst, periodic timer	
Trigger Delay	Span = 0 Hz or FFT	-150 to +500 ms
	Span $\geq$ 10 Hz, swept	0 to 500 ms
	Resolution	0.1 $\mu$ s
<b>Time gating</b>		
Gate methods	Gated LO; gated video; gated FFT	
Gate length range (except method = FFT)	1 $\mu$ s to 5.0 s	
Gate delay range	0 to 100.0 s	
Gate delay jitter	33.3 ns p-p nominal	
<b>Sweep (trace) point range</b>		
All spans	1 to 40001	
<b>Resolution bandwidth (RBW)</b>		
Range (-3.01 dB bandwidth)		
– Standard	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz	
– With Option B85 and Option RBE	10, 15, 20, 25, 30, 40, 50, 60, and 70 MHz, in Spectrum Analyzer mode and zero span	
– With Option B1X and Option RBE	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 100, and 133 MHz, in Spectrum Analyzer mode and zero span	
– With Option B2X or B5X and Option RBE	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 100, 133, 150, 200, and 212 MHz, in Spectrum Analyzer mode and zero span	
Bandwidth accuracy (power)	1 Hz to 100 kHz	$\pm 0.5\%$ ( $\pm 0.022$ dB)
RBW range	110 kHz to 1.0 MHz (< 3.6 GHz CF)	$\pm 1.0\%$ ( $\pm 0.044$ dB)
	1.1 to 2 MHz (< 3.6 GHz CF)	$\pm 0.07$ dB nominal
	2.2 to 3 MHz (< 3.6 GHz CF)	0 to -0.2 dB nominal
	4 to 8 MHz (< 3.6 GHz CF)	0 to -0.4 dB nominal
Bandwidth accuracy (-3.01 dB)		
– RBW range	1 Hz to 1.3 MHz	$\pm 2\%$ nominal
Selectivity (-60 dB/-3 dB)	4.1:1 nominal	
EMI bandwidth (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz	(Option EMC required)
EMI bandwidth (MIL STD 461E compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz	(Option EMC required)
<b>Analysis bandwidth <sup>1</sup></b>		
Maximum bandwidth	Option B25 (standard)	25 MHz
	Option B40	40 MHz
	Option B85	85 MHz
	Option B1X	160 MHz
	Option B2X	255 MHz
	Option B5X	510 MHz
<b>Video bandwidth (VBW)</b>		
Range	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)	
Accuracy	$\pm 6\%$ nominal (in swept mode and zero span)	

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.

# Amplitude Accuracy and Range Specifications

<b>Amplitude range</b>			
Measurement range			
- Preamp Off	Displayed average noise level (DANL) to +30 dBm		
- Preamp On			
- RF (Opt 503)	Displayed average noise level (DANL) to +30 dBm		
- Microwave (Opt 508, 513, 526)	Displayed average noise level (DANL) to +24 dBm		
- Millimeter-wave (Opt 544, 550)	Displayed average noise level (DANL) to +20 dBm		
Input mechanical attenuator range (2 Hz to 50 GHz)	0 to 70 dB in 2 dB steps		
<b>Electronic attenuator (Option EA3)</b>			
Frequency range	2 Hz to 3.6 GHz		
Attenuation range			
- Electronic attenuator range	0 to 24 dB, 1 dB steps		
- Full attenuation range (mechanical + electronic)	0 to 94 dB, 1 dB steps		
<b>Maximum safe input level</b>			
Average total power (with and without preamp)	+30 dBm (1 W)		
Peak pulse power (< 10 $\mu$ s pulse width, < 1% duty cycle, input attenuation $\geq$ 30 dB)	+50 dBm (100 W)		
DC volts			
- DC coupled	$\pm$ 0.2 Vdc		
- AC coupled	$\pm$ 100 Vdc (For frequency Option 503, 508, 513, or 526)		
<b>Display range</b>			
Log scale			
	0.1 to 1 dB/division in 0.1 dB steps		
	1 to 20 dB/division in 1 dB steps (10 display divisions)		
Linear scale	10 divisions		
Scale units	dBm, dBmV, dB $\mu$ V, dBmA, dB $\mu$ A, V, W, A		
<b>Frequency response</b>		<b>Specification</b>	<b>95th percentile (<math>\approx</math> 2s)</b>
(10 dB input attenuation, 20 to 30 °C, preselector centering applied above 3.6 GHz)			
RF/MW (Option 503, 508, 513, 526)	3 Hz to 10 MHz	$\pm$ 0.46 dB	
	10 to 20 MHz	$\pm$ 0.35 dB	
	20 MHz to 3.6 GHz	$\pm$ 0.35 dB	$\pm$ 0.16 dB
	3.5 to 8.4 GHz	$\pm$ 1.5 dB	$\pm$ 0.39 dB
	8.3 to 13.6 GHz	$\pm$ 2.0 dB	$\pm$ 0.56 dB
	13.5 to 22.0 GHz	$\pm$ 2.0 dB	$\pm$ 0.81 dB
	22.0 to 26.5 GHz	$\pm$ 2.5 dB	$\pm$ 0.82 dB
Millimeter-Wave (Option 544, 550)	3 Hz to 20 MHz	$\pm$ 0.46 dB	
	20 to 50 MHz	$\pm$ 0.35 dB	$\pm$ 0.19 dB
	50 MHz to 3.6 GHz	$\pm$ 0.35 dB	$\pm$ 0.15 dB
	3.5 to 5.2 GHz	$\pm$ 1.7 dB	$\pm$ 0.70 dB
	5.2 to 8.4 GHz	$\pm$ 1.5 dB	$\pm$ 0.57 dB
	8.3 to 13.6 GHz	$\pm$ 2.0 dB	$\pm$ 0.54 dB
	13.5 to 17.1 GHz	$\pm$ 2.0 dB	$\pm$ 0.64 dB
	17.0 to 22.0 GHz	$\pm$ 2.0 dB	$\pm$ 0.72 dB
	22.0 to 26.5 GHz	$\pm$ 2.5 dB	$\pm$ 0.71 dB
	26.4 to 34.5 GHz	$\pm$ 2.5 dB	$\pm$ 1.00 dB
	34.4 to 50 GHz	$\pm$ 3.2 dB	$\pm$ 1.37 dB
<b>Preamp on (0 dB attenuation) (Option P03, P08, P13, P26, P44, P50)</b>			
RF/MW (Option 503, 508, 513, 526)	9 to 100 kHz		$\pm$ 0.38 dB
	100 kHz to 50 MHz	$\pm$ 0.68 dB	$\pm$ 0.34 dB
	50 MHz to 3.6 GHz	$\pm$ 0.55 dB	$\pm$ 0.30 dB
	3.5 to 8.4 GHz	$\pm$ 2.0 dB	$\pm$ 0.69 dB
	8.3 to 13.6 GHz	$\pm$ 2.3 dB	$\pm$ 0.71 dB
	13.5 to 17.1 GHz	$\pm$ 2.5 dB	$\pm$ 0.95 dB
	17.0 to 22.0 GHz	$\pm$ 3.0 dB	$\pm$ 1.41 dB
22.0 to 26.5 GHz	$\pm$ 3.5 dB	$\pm$ 1.61 dB	

## Amplitude Accuracy and Range Specifications (Continued)

Millimeter-Wave (Option 544, 550)	9 to 100 kHz		± 0.40 dB
	100 kHz to 50 MHz	± 0.68 dB	± 0.34 dB
	50 MHz to 3.6 GHz	± 0.60 dB	± 0.31 dB
	3.5 to 5.2 GHz	± 2.0 dB	± 0.81 dB
	5.2 to 8.4 GHz	± 2.0 dB	± 0.70 dB
	8.3 to 13.6 GHz	± 2.3 dB	± 0.79 dB
	13.5 to 17.1 GHz	± 2.5 dB	± 0.88 dB
	17.0 to 22.0 GHz	± 3.0 dB	± 1.07 dB
	22.0 to 26.5 GHz	± 3.5 dB	± 1.03 dB
	26.4 to 34.5 GHz	± 3.0 dB	± 1.35 dB
	34.4 to 50 GHz	± 4.1 dB	± 1.69 dB
<b>Input attenuation switching uncertainty</b>		<b>Specifications</b>	<b>Additional information</b>
Relative to 10 dB and preamp off			
At 50 MHz (reference frequency)	Attenuation 12 to 40 dB	± 0.14 dB	± 0.04 dB typical
	Attenuation 2 to 8 dB	± 0.18 dB	± 0.06 dB typical
	Attenuation 0 dB		± 0.05 dB nominal
Attenuation > 2 dB			
- 3 Hz to 3.6 GHz			± 0.3 dB nominal
- 3.5 to 8.4 GHz			± 0.5 dB nominal
- 8.3 to 13.6 GHz			± 0.7 dB nominal
- 13.5 to 26.5 GHz			± 0.7 dB nominal
- 26.4 to 50 GHz			± 1.0 dB nominal
<b>Total absolute amplitude accuracy</b>			
(10 dB attenuation, 20 to 30 °C, 1 Hz ≤ RBW ≤ 1 MHz, input signal -10 to -50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, s = nominal standard deviation)			
	At 50 MHz	± 0.24 dB	
	At all frequencies	± (0.24 dB + frequency response)	
	10 Hz to 3.6 GHz	± 0.19 dB (95th Percentile approx. 2s)	
Preamp on (Option P03, P08, P13, P26, P44 and P50)	At all frequencies	± (0.36 dB + frequency response)	
<b>Input voltage standing wave ratio (VSWR)</b>			
(10 dB input attenuation)	50 MHz	Freq Opt 503, 508, 513, 526 1.09 nominal	Freq Opt 544, 550 1.025 nominal
	10 MHz to 3.6 GHz	1.139 (95th percentile)	1.134 (95th percentile)
	3.5 to 8.4 GHz	1.290 (95th percentile)	1.152 (95th percentile)
	8.3 to 13.6 GHz	1.388 (95th percentile)	1.178 (95th percentile)
	13.5 to 17.1 GHz	1.41 (95th percentile)	1.212 (95th percentile)
	17.0 to 26.5 GHz	1.48 (95th percentile)	1.331 (95th percentile)
	26.4 to 34.5 GHz	NA	1.373 (95th percentile)
	34.4 to 50 GHz	NA	1.389 (95th percentile)
	Preamp on (0 dB input attenuation) (Option P03, P08, P13, P26, P44, and P50)	10 MHz to 3.6 GHz	1.71 (95th percentile)
3.5 to 8.4 GHz		1.54 (95th percentile)	1.50 (95th percentile)
8.3 to 13.6 GHz		1.57 (95th percentile)	1.310 (95th percentile)
13.5 to 17.1 GHz		1.48 (95th percentile)	1.330 (95th percentile)
17.0 to 26.5 GHz		1.54 (95th percentile)	1.339 (95th percentile)
26.4 to 34.5 GHz		NA	1.41 (95th percentile)
Preamp on (0 dB input attenuation) (Option P03, P08, P13, P26, P44, and P50)	10 MHz to 3.6 GHz	1.71 (95th percentile)	1.393 (95th percentile)
	3.5 to 8.4 GHz	1.54 (95th percentile)	1.50 (95th percentile)
	8.3 to 13.6 GHz	1.57 (95th percentile)	1.310 (95th percentile)
	13.5 to 17.1 GHz	1.48 (95th percentile)	1.330 (95th percentile)
	17.0 to 26.5 GHz	1.54 (95th percentile)	1.339 (95th percentile)
	26.4 to 34.5 GHz	NA	1.41 (95th percentile)
Preamp on (0 dB input attenuation) (Option P03, P08, P13, P26, P44, and P50)	10 MHz to 3.6 GHz	1.71 (95th percentile)	1.393 (95th percentile)
	3.5 to 8.4 GHz	1.54 (95th percentile)	1.50 (95th percentile)
	8.3 to 13.6 GHz	1.57 (95th percentile)	1.310 (95th percentile)
	13.5 to 17.1 GHz	1.48 (95th percentile)	1.330 (95th percentile)
	17.0 to 26.5 GHz	1.54 (95th percentile)	1.339 (95th percentile)
	26.4 to 34.5 GHz	NA	1.41 (95th percentile)
Preamp on (0 dB input attenuation) (Option P03, P08, P13, P26, P44, and P50)	10 MHz to 3.6 GHz	1.71 (95th percentile)	1.393 (95th percentile)
	3.5 to 8.4 GHz	1.54 (95th percentile)	1.50 (95th percentile)
	8.3 to 13.6 GHz	1.57 (95th percentile)	1.310 (95th percentile)
	13.5 to 17.1 GHz	1.48 (95th percentile)	1.330 (95th percentile)
	17.0 to 26.5 GHz	1.54 (95th percentile)	1.339 (95th percentile)
	26.4 to 34.5 GHz	NA	1.41 (95th percentile)
Preamp on (0 dB input attenuation) (Option P03, P08, P13, P26, P44, and P50)	10 MHz to 3.6 GHz	1.71 (95th percentile)	1.393 (95th percentile)
	3.5 to 8.4 GHz	1.54 (95th percentile)	1.50 (95th percentile)
	8.3 to 13.6 GHz	1.57 (95th percentile)	1.310 (95th percentile)
	13.5 to 17.1 GHz	1.48 (95th percentile)	1.330 (95th percentile)
	17.0 to 26.5 GHz	1.54 (95th percentile)	1.339 (95th percentile)
	26.4 to 34.5 GHz	NA	1.41 (95th percentile)
Preamp on (0 dB input attenuation) (Option P03, P08, P13, P26, P44, and P50)	10 MHz to 3.6 GHz	1.71 (95th percentile)	1.393 (95th percentile)
	3.5 to 8.4 GHz	1.54 (95th percentile)	1.50 (95th percentile)
	8.3 to 13.6 GHz	1.57 (95th percentile)	1.310 (95th percentile)
	13.5 to 17.1 GHz	1.48 (95th percentile)	1.330 (95th percentile)
	17.0 to 26.5 GHz	1.54 (95th percentile)	1.339 (95th percentile)
	26.4 to 34.5 GHz	NA	1.41 (95th percentile)

## Amplitude Accuracy and Range Specifications (Continued)

<b>Resolution bandwidth switching uncertainty (referenced to 30 kHz RBW)</b>		
1 Hz to 1.5 MHz RBW	± 0.03 dB	
1.6 MHz to 2.7 MHz RBW	± 0.05 dB	
3 MHz RBW	± 0.10 dB	
4, 5, 6, 8 MHz RBW	± 0.30 dB	
<b>Reference level</b>		
Range		
– Log scale	–170 to +30 dBm in 0.01 dB steps	
– Linear scale	707 pV to 7.07 V with 0.11% (0.01 dB) resolution	
Accuracy	0 dB <sup>1</sup>	
<b>Display scale switching uncertainty</b>		
Switching between linear and log	0 dB <sup>1</sup>	
Log scale/div switching	0 dB <sup>1</sup>	
<b>Display scale fidelity</b>		
Between –10 dBm and –18 dBm input mixer level	± 0.10 dB total	± 0.04 dB typical
Below –18 dBm input mixer level	± 0.07 dB	± 0.02 dB typical
<b>Trace detectors</b>		
Standard	Normal, peak, sample, negative peak, log power average, RMS average, and voltage average	
With Option EMC	Add quasi-peak to above	
<b>Preamplifier</b>		
Frequency range <sup>2</sup>	Option P03	9 kHz to 3.6 GHz
	Option P08	9 kHz to 8.4 GHz
	Option P13	9 kHz to 13.6 GHz
	Option P26	9 kHz to 26.5 GHz
	Option P44	9 kHz to 44 GHz
	Option P50	9 kHz to 50 GHz
Gain	100 kHz to 3.6 GHz	+20 dB nominal
	3.6 to 26.5 GHz	+35 dB nominal
	26.5 to 50 GHz	+40 dB nominal

1. Only affects the display, not the measurement, so it causes no additional error in measurement results from trace data or markers.
2. Below 100 kHz, only 95th percentile (approx. 2s) value for frequency response is provided.



# Dynamic Range Specifications

1 dB gain compression (two-tone)		Maximum power at input mixer	
(At 1 kHz RBW with 100 kHz tone spacing, 20 to 30 °C)			
	20 to 40 MHz	-3 dBm	0 dBm typical
	40 to 200 MHz	+1 dBm	+3 dBm typical
	200 MHz to 3.6 GHz	+3 dBm	+5 dBm typical
	3.6 to 16 GHz	+1 dBm	+4 dBm typical
	16 to 26.5 GHz	-1 dBm	+2 dBm typical
	26.5 to 50 GHz		0 dBm nominal
Preamp on (Option P03, P08, P13, P26, P44, and P50)	10 MHz to 3.6 GHz		-14 dBm nominal
	3.6 to 26.5 GHz		
	Tone spacing 100 kHz to 20 MHz		-28 dBm nominal
	Tone spacing > 70 MHz		
	Freq Option ≤ 526		-10 dBm nominal
	Freq Option > 526		-20 dBm nominal
	26.5 to 50 GHz		-30 dBm nominal

Displayed average noise level (DANL) <sup>4</sup>	Specification	Typical
(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 1 Hz RBW, 20 to 30 °C)		

RF/MW (Option 503, 508, 513, 526)	Normal 1/LNP enabled <sup>2</sup>	Normal 1/LNP enabled <sup>2</sup>
Preamp off	3 Hz to 9 kHz	-100 dBm/NA nominal
	9 to 100 kHz	-146 dBm/NA typical
	100 kHz to 1 MHz	-150 dBm/NA typical
	1 to 10 MHz	-155 dBm/NA typical
	10 MHz to 1.2 GHz	-154 dBm/NA typical
	1.2 to 2.1 GHz	-155 dBm/NA typical
	2.1 to 3.0 GHz	-153 dBm/NA typical
	3.0 to 3.6 GHz	-151 dBm/NA typical
	3.5 to 4.2 GHz	-147 dBm/-153 dBm
	4.2 to 8.4 GHz	-150 dBm/-155 dBm
	8.3 to 13.6 GHz	-149 dBm/-155 dBm
	13.5 to 16.9 GHz	-145 dBm/-152 dBm
	16.9 to 20.0 GHz	-143 dBm/-151 dBm
	20.0 to 26.5 GHz	-137 dBm/-150 dBm
Preamp on <sup>3</sup>	100 to 200 kHz	-152 dBm/NA typical
	200 to 500 kHz	-155 dBm/NA typical
	0.5 to 1 MHz	-157 dBm/NA typical
	1 to 10 MHz	-161 dBm/NA typical
	10 MHz to 2.1 GHz	-165 dBm/NA typical
	2.1 to 3.6 GHz	-163 dBm/NA typical
	3.5 to 8.4 GHz	-164 dBm/NA typical
	8.3 to 13.6 GHz	-163 dBm/NA typical
	13.5 to 16.9 GHz	-161 dBm/NA typical
	16.9 to 20.0 GHz	-159 dBm/NA typical
20.0 to 26.5 GHz	-155 dBm/NA typical	

### DANL with Noise Floor Extension (Option NF2)

DANL improvement exceeds 9 dB with 95% confidence in the average of all bands, paths (normal, preamp, low noise path and microwave preselector bypass), frequency options and signal path options (LNP and MPB).

DANL with Noise Floor Extension	
Frequency	Preamp On
Band 0, f > 20 MHz	-174 dBm
Band 1	-174 dBm
Band 2	-173 dBm
Band 3	-172 dBm
Band 4	-166 dBm

1. With Option NF2 (Noise Floor Extension) "Off".

2. LNP (Low Noise Path) requires option LNP.

3. At higher frequency bands (beyond 3.6 GHz), Preamp "On" supersedes "LNP enabled". LNP cannot operate simultaneously with preamp.

4. With standard LO. Instruments with DDS LO (Option EPO) may see a few dB degradation in DANL. See specifications guide for details.



## Dynamic Range Specifications (Continued)

Displayed average noise level (DANL) <sup>1</sup>	Specification	Typical
Millimeter-Wave (Option 544, 550)	Normal <sup>2</sup> /LNP enabled <sup>3</sup>	Normal <sup>2</sup> /LNP enabled <sup>3</sup>
Preamp off	3 Hz to 9 kHz	-100 dBm/NA nominal
	9 to 100 kHz	-146 dBm/NA
	100 kHz to 1 MHz	-150 dBm/NA
	1 to 10 MHz	-155 dBm/NA
	10 MHz to 1.2 GHz	-154 dBm/NA
	1.2 to 2.1 GHz	-153 dBm/NA
	2.1 to 3 GHz	-151 dBm/NA
	3 to 3.6 GHz	-151 dBm/NA
	3.5 to 4.2 GHz	-143 dBm/-150 dBm
	4.2 to 6.6 GHz	-144 dBm/-152 dBm
	6.6 to 8.4 GHz	-147 dBm/-154 dBm
	8.3 to 13.6 GHz	-147 dBm/-153 dBm
	13.5 to 14 GHz	-143 dBm/-150 dBm
	14 to 17 GHz	-145 dBm/-151 dBm
	17 to 22.5 GHz	-141 dBm/-149 dBm
	22.5 to 26.5 GHz	-139 dBm/-146 dBm
	26.4 to 30 GHz	-138 dBm/-146 dBm
	30 to 34 GHz	-138 dBm/-146 dBm
	33.9 to 37 GHz	-134 dBm/-141 dBm
	37 to 40 GHz	-132 dBm/-140 dBm
40 to 46 GHz	-130 dBm/-140 dBm	
46 to 49 GHz	-130 dBm/-138 dBm	
49 to 50 GHz	-128 dBm/-138 dBm	
Preamp on <sup>4</sup>	100 to 200 kHz	-152 dBm
	200 to 500 kHz	-155 dBm
	500 kHz to 1 MHz	-157 dBm
	1 to 10 MHz	-161 dBm
	10 MHz to 2.1 GHz	-164 dBm
	2.1 to 3.6 GHz	-163 dBm
	3.5 to 8.4 GHz	-161 dBm
	8.3 to 13.6 GHz	-161 dBm
	13.5 to 17.1 GHz	-161 dBm
	17 to 20 GHz	-160 dBm
	20 to 26.5 GHz	-158 dBm
	26.4 to 30 GHz	-157 dBm
	30 to 34 GHz	-155 dBm
	33.9 to 37 GHz	-153 dBm
	37 to 40 GHz	-152 dBm
	40 to 46 GHz	-149 dBm
	46 to 50 GHz	-146 dBm

1. With standard LO. Instruments with DDS LO (Option EP0) may see a few dB degradation in DANL. See specifications guide for details.

2. With Option NF2 (Noise Floor Extension) "Off".

3. LNP (Low Noise Path) requires option LNP.

4. At higher frequency bands (beyond 3.6 GHz), Preamp "On" supersedes "LNP enabled". LNP cannot operate simultaneously with preamp.

## Dynamic Range Specifications (Continued)

### DANL with Noise Floor Extension (Option NF2) on 95th percentile

DANL improvement exceeds 9 dB with 95% confidence in the average of all bands, paths (normal, preamp, low noise path and microwave preselector bypass), frequency options and signal path options (LNP and MPB).

DANL with Noise Floor Extension	Preamp Off	Preamp On	LNP enabled <sup>1,2</sup>
- Band 0, f > 20 MHz	-163 dBm	-174 dBm	N/A
- Band 1	-159 dBm	-172 dBm	-164 dBm
- Band 2	-159 dBm	-172 dBm	-164 dBm
- Band 3	-159 dBm	-173 dBm	-164 dBm
- Band 4	-154 dBm	-169 dBm	-161 dBm
- Band 5	-153 dBm	-167 dBm	-161 dBm
- Band 6	-144 dBm	-158 dBm	-152 dBm

1. LNP (Low Noise Path) requires option LNP.

2. At higher frequency bands (beyond 3.6 GHz), Preamp "On" supersedes "LNP enabled". LNP cannot operate simultaneously with preamp.

## Dynamic Range Specifications (Continued)

<b>Residuals, images, and spurious responses</b>				
Residual responses (Input terminated and 0 dB attenuation)	200 kHz to 8.4 GHz	-100 dBm		
	Zero span or FFT or other frequencies	-100 dBm nominal		
<b>Image responses<sup>4</sup></b>	<b>Tuned Freq (f)</b>	<b>Excitation Freq</b>	<b>Response RF/MW (Opt 503, 508, 513, 526)</b>	<b>mmW (Opt 544, 550)</b>
Mixer level at -10 dBm	10 MHz to 26.5 GHz	f+45 MHz	-80 dBc/-118 dBc typical	-80 dBc/-118 dBc typical
	10 MHz to 3.6 GHz	f+10,245 MHz	-80 dBc/-112 dBc typical	-80 dBc/-112 dBc typical
	10 MHz to 3.6 GHz	f+645 MHz	-80 dBc/-101 dBc typical	-80 dBc/-101 dBc typical
	3.5 to 13.6 GHz	f+645 MHz	-78 dBc/-87 dBc typical	-80 dBc/-102 dBc typical
	13.5 to 17.1 GHz	f+645 MHz	-74 dBc/-84 dBc typical	-80 dBc/-102 dBc typical
	17.0 to 22 GHz	f+645 MHz	-70 dBc/-82 dBc typical	-80 dBc/-100 dBc typical
	22 to 26.5 GHz	f+645 MHz	-68 dBc/-79 dBc typical	-70 dBc/-97 dBc typical
Mixer level at -30 dBm	26.5 to 34.5 GHz	f+645 MHz	-70 dBc/-94 dBc typical	
	34.4 to 42 GHz	f+645 MHz	-59 dBc/-79 dBc typical	
	42 to 50 GHz	f+645 MHz	-75 dBc nominal	
	26.5 to 50 GHz	f+45 MHz	-90 dBc nominal	
<b>Other spurious responses</b>	<b>Mixer level</b>	<b>Response</b>		
Carrier frequency $\leq$ 26.5 GHz				
- First RF order (f $\geq$ 10 MHz from carrier)	-10 dBm	-80 dBc + 20log(N <sup>1</sup> ) Including IF feedthrough, LO harmonic mixing responses		
- Higher RF order (f $\geq$ 10 MHz from carrier)	-40 dBm	-80 dBc + 20log(N <sup>1</sup> ) Including higher order mixer responses		
Carrier frequency > 26.5 GHz				
- First RF order (f $\geq$ 10 MHz from carrier)	-30 dBm	-90 dBc nominal		
- Higher RF order (f $\geq$ 10 MHz from carrier)	-30 dBm	-90 dBc nominal		
LO-related spurious responses (200 Hz $\leq$ f < 10 MHz from carrier)	-10 dBm	-68 dBc <sup>2</sup> + 20log(N <sup>1</sup> )		
Line-related spurious responses		-73 dBc <sup>2</sup> + 20log(N <sup>1</sup> ) (nominal)		
<b>Second harmonic distortion (SHI)</b>				
	<b>Source frequency</b>	<b>Mixer level</b>	<b>Distortion<sup>3</sup> (LNP Off/LNP On)</b>	<b>SHI<sup>3</sup> (LNP Off/LNP On)</b>
RF/MW (Option 503, 508, 513, 526)	10 to 100 MHz	-15 dBm	-57 dBc/NA	+42 dBm/NA
	0.1 to 1.8 GHz	-15 dBm	-60 dBc/NA	+45 dBm/NA
	1.75 to 2.5 GHz	-15 dBm	-77 dBc/-95 dBc	+62 dBm/+80 dBm
	2.5 to 4 GHz	-15 dBm	-77 dBc/-101 dBc	+62 dBm/+86 dBm
	4 to 6.5 GHz	-15 dBm	-77 dBc/-105 dBc	+62 dBm/+90 dBm
	6.5 to 10 GHz	-15 dBm	-70 dBc/-105 dBc	+55 dBm/+90 dBm
	10 to 13.25 GHz	-15 dBm	-62 dBc/-105 dBc	+47 dBm/+90 dBm
Millimeter-Wave (Option 544, 550)	10 to 100 MHz	-15 dBm	-57 dBc/NA	+42 dBm/NA
	100 M to 1.8 GHz	-15 dBm	-60 dBc/NA	+45 dBm/NA
	1.8 to 2.5 GHz	-15 dBm	-72 dBc/-95 dBc	+57 dBm/+80 dBm
	2.5 to 3 GHz	-15 dBm	-72 dBc/-99 dBc	+57 dBm/+84 dBm
	3 to 5 GHz	-15 dBm	-77 dBc/-99 dBc	+62 dBm/+84 dBm
	5 to 6.5 GHz	-15 dBm	-77 dBc/-105 dBc	+62 dBm/+90 dBm
	6.5 to 10 GHz	-15 dBm	-70 dBc/-105 dBc	+55 dBm/+90 dBm
	10 to 13.25 GHz	-15 dBm	-62 dBc/-105 dBc	+47 dBm/+90 dBm
	13.25 to 25 GHz	-15 dBm	-65 dBc/-105 dBc (nom.)	+50 dBm/+90 dBm (nom.)
		<b>Preamp level</b>	<b>Distortion</b>	<b>SHI</b>
Preamp on (Option P03, P08, P13, P26, P44, P50)	10 MHz to 1.8 GHz	-45 dBm	-78 dBc nominal	+33 dBm nominal
	1.8 to 13.25 GHz	-50 dBm	-60 dBc nominal	+10 dBm nominal
	13.25 to 25 GHz	-50 dBm	-50 dBm nominal	0 dBm nominal

1. N is the LO multiplication factor. Refer to page 4 for the N value verses frequency ranges.
2. Nominally -40 dBc under large magnetic (0.38 Gauss rms) or vibrational (0.21 g rms) environmental stimuli.
3. Normal path/LNP enabled (requires Option LNP).
4. With standard LO. Instruments with DDS LO (option EPO) may see a few dB degradation in DANL. See specifications guide for details.

## Dynamic Range Specifications (Continued)

### Third-order intermodulation distortion (TOI)

Two -16 dBm tones (10 MHz to 26.5 GHz) or two -20 dBm tones (26.5 GHz to 50 GHz) at input mixer with tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C

For all frequency options (Option 503, 508, 513, 526, 544, and 550)	10 to 150 MHz	+13 dBm	+16 dBm typical
	150 to 600 MHz	+18 dBm	+21 dBm typical
	0.6 to 1.1 GHz	+20 dBm	+22 dBm typical
	1.1 to 3.6 GHz	+21 dBm	+23 dBm typical
For RF/MW only (Option 503, 508, 513, and 526)	3.5 to 8.4 GHz	+17 dBm	+23 dBm typical
	8.3 to 13.6 GHz	+17 dBm	+23 dBm typical
	13.5 to 17.1 GHz	+15 dBm	+20 dBm typical
	17.0 to 26.5 GHz	+16 dBm	+22 dBm typical
For Millimeter-Wave only (Option 544 and 550)	3.5 to 8.4 GHz	+16 dBm	+23 dBm typical
	8.3 to 13.6 GHz	+16 dBm	+23 dBm typical
	13.5 to 17.1 GHz	+13 dBm	+17 dBm typical
	17.0 to 26.5 GHz	+13 dBm	+20 dBm typical
	26.4 to 34.5 GHz	+13 dBm	+18 dBm typical
	34.4 to 50 GHz	+10 dBm	+15 dBm typical
Preamp on (Option P03, P08, P13, P26, P44, and P50)			
Tones at preamp input			
- (two -45 dBm)	10 to 500 MHz		+4 dBm nominal
- (two -45 dBm)	500 MHz to 3.6 GHz		+4.5 dBm nominal
- (two -50 dBm)	3.6 to 26.5 GHz		-15 dBm nominal

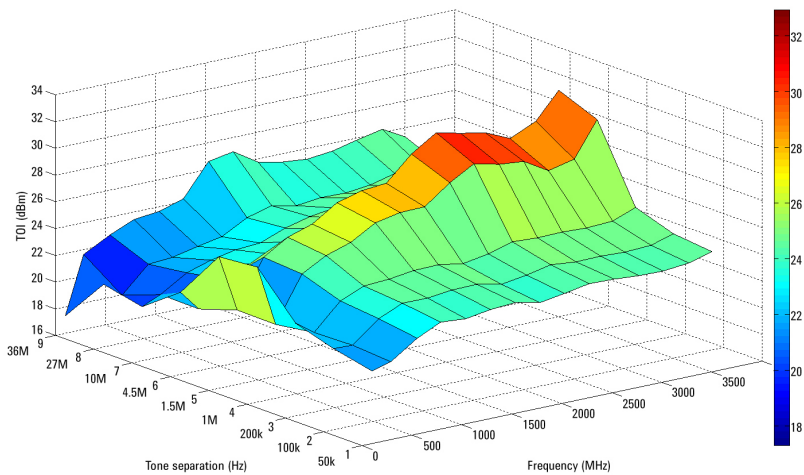


Figure 1. Nominal TOI performance versus frequency and tone separation.

## Dynamic Range Specifications (Continued)

Phase noise	Offset	Specification	Typical
<b>Noise sidebands (20 to 30 °C, CF = 1 GHz)</b>			
Standard LO	10 Hz		-80 dBc/Hz nominal
	100 Hz	-94 dBc/Hz	-100 dBc/Hz typical
	1 kHz	-121 dBc/Hz	-125 dBc/Hz typical
	10 kHz	-129 dBc/Hz	-132 dBc/Hz typical
	30 kHz	-130 dBc/Hz	-132 dBc/Hz typical
	100 kHz	-129 dBc/Hz	-131 dBc/Hz typical
	1 MHz	-145 dBc/Hz	-146 dBc/Hz typical
	10 MHz	-155 dBc/Hz	-158 dBc/Hz typical
DDS LO (Option EP0)	10 Hz		-95 dBc/Hz typical <sup>1</sup>
	100 Hz	-107 dBc/Hz	-112 dBc/Hz typical
	1 kHz	-125 dBc/Hz	-129 dBc/Hz typical
	10 kHz	-134 dBc/Hz	-136 dBc/Hz typical
	100 kHz	-139 dBc/Hz	-141 dBc/Hz typical
	1 MHz	-145 dBc/Hz	-146 dBc/Hz typical
	10 MHz	-155 dBc/Hz	-157 dBc/Hz typical
	<b>Option MPB, microwave preselector bypass<sup>2</sup></b>		
<b>Frequency range</b>			
N9030B-508	3.6 to 8.4 GHz		
N9030B-513	3.6 to 13.6 GHz		
N9030B-526	3.6 to 26.5 GHz		
N9030B-544	3.6 to 44 GHz		
N9030B-550	3.6 to 50 GHz		

1. For wide reference loop bandwidth.
2. When Option MPB is installed and enabled, some aspects of the analyzer performance change. Please refer to the PXA specification guide for more details.

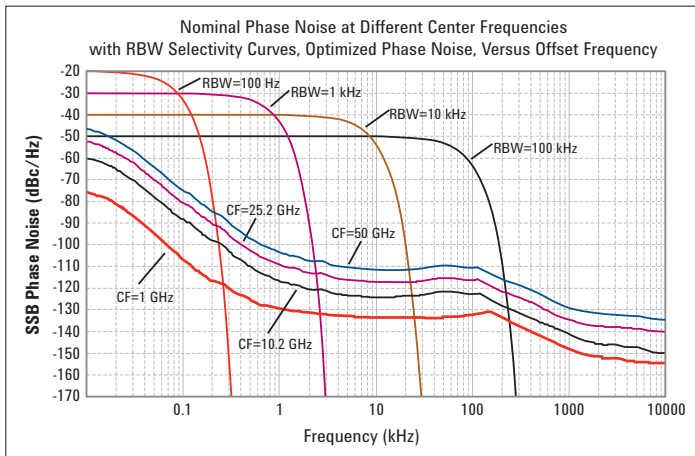


Figure 3. Nominal PXA phase noise at various center frequencies with standard LO.

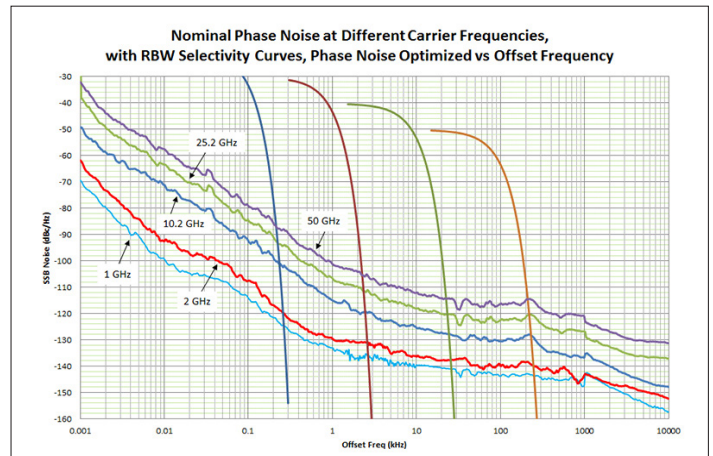


Figure 4. Nominal PXA phase noise at various center frequencies with DDS LO (Option EP0).

# PowerSuite Measurement Specifications

<b>Channel power</b>		
Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, attenuation = 10 dB)	± 0.61 dB (± 0.19 dB 95th percentile)	
<b>Occupied bandwidth</b>		
Frequency accuracy	± [span/1000] nominal	
<b>Adjacent channel power</b>		
Accuracy, 3GPP W-CDMA (ACLR) (at specific mixer levels and ACLR ranges)	Adjacent	Alternate
– MS (UE)	± 0.08 dB	± 0.09 dB
– BTS	± 0.22 dB	± 0.18 dB
Dynamic range (typical)		
– Without noise correction	-81.5 dB	-87 dB
– With noise correction	-82.5 dB	-88 dB
Offset channel pairs measured	1 to 6	
<b>Multi-carrier ACP</b>		
Accuracy, 3GPP W-CDMA (ACPR) (4 carriers, 5 MHz offset, BTS, UUT ACPR range at -42 to -48 dB, optimal mixer level at -21 dBm)	± 0.09 dB	
Multiple number of carriers measured	Up to 12	
<b>Power statistics CCDF</b>		
Histogram resolution	0.01 dB	
<b>Harmonic distortion</b>		
Maximum harmonic number	10th	
Result	Fundamental power (dBm), relative harmonics power (dBc), total harmonic distortion in %	
Intermod (TOI)	Measure the third-order products and intercepts from two tones	
<b>Burst power</b>		
Methods	Power above threshold, power within burst width	
Results	Single burst output power, average output power, maximum power, minimum power within burst, burst width	
<b>Spurious emission</b>		
3GPP W-CDMA table-driven spurious signals; search across regions		
– Dynamic range (RBW=1 MHz) (1 to 3.6 GHz)	88.8 dB	91.8 dB typical
– Absolute sensitivity (RBW=1 MHz) (1 to 3.6 GHz)	-88.5 dBm	-91.5 dBm typical
<b>Spectrum emission mask (SEM)</b>		
cdma2000® (750 kHz offset)		
– Relative dynamic range	85.9 dB	89.5 dB typical
– Absolute sensitivity	-103.7 dBm	-106.7 dBm typical
– Relative accuracy	± 0.08 dB	
3GPP W-CDMA (2.515 MHz offset)		
– Relative dynamic range	87.9 dB	92.6 dB typical
– Absolute sensitivity	-103.7 dBm	-106.7 dBm typical
– Relative accuracy	± 0.08 dB	

## General Specifications

<b>Temperature range</b>		
Operating	0 to 55 °C	
Storage	-40 to +70 °C	
<b>Altitude</b>		
	4,500 meters (approx 15,000 feet)	
<b>EMC</b>		
Complies with the essential requirements of the European EMC Directive as well as current editions of the following standards (dates and editions are cited in the Declaration of Conformity):		
- IEC/EN 61326-1		
- CISPR 11 Group 1, Class A		
- AS/NZS CISPR 11		
- ICES/NMB-001		
This ISM device complies with Canadian ICES-001		
Cet appareil ISM est conforme a la norme NMB-001 du Canada		
<b>South Korean Class A EMC declaration</b>		
This equipment is Class A suitable for professional use and is for use in electromagnetic environments outside of the home.		
A 급 기기 (업무용 방송통신기자재)이 기 기는 업무용 (A 급) 전자파적합기기로서 판 매자 또는 사용자는 이 점을 주 의하시기 바라 며, 가 정외의 지역에서 사용하는 것을 목적으 로 합니다.		
<b>Safety</b>		
Complies with the essential requirements of the European Low Voltage Directive as well as current editions of the following standards (dates and editions are cited in the Declaration of Conformity):		
- IEC/EN 61010-1		
- Canada: CSA C22.2 No. 61010-1		
- USA: UL std no. 61010-1		
<b>Acoustic statement (European Machinery Directive)</b>		
Acoustic noise emission		
LpA < 70 dB		
Operator position		
Normal operation mode per ISO 7779		
<b>Acoustic noise - more information</b>		
(Values given are per ISO 7779 standard in the "Operator Sitting" position)		
Ambient temperature		
- < 40 °C	Nominally under 55 dBA Sound Pressure. 55 dBA is generally considered suitable for use in quiet office environment	
- ≥ 40 °C	Nominally under 65 dBA Sound Pressure. 65 dBA is generally considered suitable for use in noisy office environment	
<b>Environmental stress</b>		
Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MILPRF-28800F Class 3.		
<b>Power requirements</b>		
Voltage and frequency	100 /120 V, 50/60/400 Hz 220/240 V, 50/60 Hz	The instruments can operate with mains supply voltage fluctuations up to ± 10% of the nominal voltage
Power consumption		
- On	630 W (Maximum)	
- Standby	45 W	



## General Specifications (Continued)

<b>Display</b>	
Resolution	1280 x 800
Size	269 mm (10.6 in.) diagonal (nominal) capacitive multi-touch screen
<b>Data storage</b>	
Internal	Removable solid state drive (≥ 160 GB) and secure digital (SD) memory device
External	Supports USB 3.0/2.0 compatible memory devices
<b>Weight (without options)</b>	
Net	22 kg (48 lbs) nominal
Shipping	34 kg (75 lbs) nominal
<b>Dimensions</b>	
Height	177 mm (7.0 in)
Width	426 mm (16.8 in)
Length	556 mm (21.9 in)
<b>Calibration cycle</b>	
The recommended calibration cycle is one year. Calibration services are available through Keysight service centers	

## Inputs and Outputs

<b>Front panel</b>	
RF input connector	
– Standard (Option 503, 508, 513, 526)	Type-N female, 50 Ω nominal
– Option C35 (with Option 526 only)	APC 3.5 mm male, 50 Ω nominal
– Standard (Option 544, 550)	2.4 mm male, 50 Ω nominal
Analog baseband IQ inputs (Option BBA) <sup>1</sup>	
– Connectors (I, Q, I-Bar, Q-Bar, and Cal Out)	BNC female
– Cal Out	AC coupled square wave
– Signal	Selectable between 1 kHz and 250 kHz
– Frequency	50 Ω, 1 MΩ (selectable, nominal)
Input impedance (4 connectors: I, Q, I-, Q-)	
Probes supported <sup>2</sup>	
– Active probe	1130A, 1131A, 1132A, 1134A
– Passive probe	1161A
– Input return loss	-5 dB (0 to 10 MHz, nominal)
– 50 Ω impedance only selected	-0 dB (10 to 40 MHz, nominal)
Probe power	
– Voltage/current	+15 Vdc, ± 7% at 150 mA max nominal -12.6 Vdc, ± 10% at 150 mA max nominal
USB ports	
– Host (3 ports)	
– Standard	Compatible with USB 2.0
– Connector	USB Type-A female
– Output current	
– Port marked with lightning bolt	1.2 A (nominal)
– Ports not marked with lightning bolt	0.5 A
Headphone jack	Miniature stereo audio jack (3.5 mm, also known as “1/8 inch”)

1. For additional specifications, please refer to Chapter BBA in the PXA Signal Analyzer specification guide.

2. For more details, please refer to the Keysight Probe Configuration Guides, literature numbers 5968-7141EN and 5989-6162EN; probe heads are necessary to attach to your device properly and probe connectivity kits such as E2668B, E2669A, or E2675A are required.

## Inputs and Outputs (Continued)

<b>External mixing, Option EXM</b>	
Connection port	
– Connector	SMA, female
– Impedance	50 $\Omega$ nominal
– Functions	Triplexed for mixer bias, IF input and LO output
Mixer bias range	$\pm$ 10 mA in 10 $\mu$ A step
IF input center frequency	
– $\leq$ 25 MHz IF path	322.5 MHz
– 40 MHz BW IF path	250.0 MHz
– 85 or 160 MHz BW IF path	300 MHz
– 255 MHz BW IF path	750.0 MHz
– 510 MHz BW IF path	877.1484375 MHz
LO output frequency range	3.75 to 14.0 GHz
<b>Rear panel</b>	
10 MHz out	
– Connector	BNC female, 50 $\Omega$ nominal
– Output amplitude	$\geq$ 0 dBm nominal
– Frequency	10 MHz + (10 MHz x frequency reference accuracy)
Ext Ref In	
– Connector	BNC female, 50 $\Omega$ nominal
– Input amplitude range	-5 to 10 dBm nominal
– Input frequency	1 to 50 MHz nominal (selectable to 1 Hz resolution)
– Frequency lock range	$\pm$ 2 x 10 <sup>-6</sup> of specified external reference input frequency
Trigger 1 and 2 inputs	
– Connector	BNC female
– Impedance	> 10 k $\Omega$ nominal
– Trigger level range	-5 to +5 V (TTL) factory preset
Trigger 1 and 2 outputs	
– Connector	BNC female
– Impedance	50 $\Omega$ nominal
– Level	0 to 5 V (CMOS) nominal
Sync (reserved for future use)	
– Connector	BNC female
Monitor output 1	
– Connector	VGA compatible, 15-pin mini D-SUB
– Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
– Resolution	1024 x 768
Monitor output 2	
– Connector	Mini DisplayPort
– Resolution	1024 x 768
Noise source drive +28 V (pulsed)	
– Connector	BNC female
– Output voltage	On 28.0 $\pm$ 0.1 V (60 mA maximum) Off < 1 V
SNS series noise source	For use with the Agilent/Keysight SNS Series noise sources
Digital bus	
– Connector	MDR-80

## Inputs and Outputs (Continued)

<b>Rear panel</b>	
Analog out	
– Connector	BNC female
USB ports	
– Host, super speed	2 ports (stacked with each other)
– Standard	Compatible with USB 3.0
– Connector	USB Type-A female
– Output current	0.9 A
– Host	1 port (stacked with LAN)
– Standard	USB 2.0
– Connector	USB Type-A female
– Output current	0.5 A
– Device	
– Standard	Compatible with USB 3.0
– Connector	USB Type-B female
GPIB interface	
– Connector	IEEE-488 bus connector
– GPIB codes	SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0
– GPIB mode	Controller or device
LAN TCP/IP interface	
– Standard	1000Base-T
– Connector	RJ45 Ethertwist
IF output	
– Connector	SMA female, shared by Opts CR3, CRP, and ALV
– Impedance	50 $\Omega$ nominal
<b>2nd IF output, Option CR3</b>	
Center frequency	
– SA mode or I/Q analyzer with IF BW $\leq$ 25 MHz	322.5 MHz
– with Option B40	250 MHz
– with Option B85/B1X	300 MHz
– with Option B2X	750 MHz
– with Option B5X	877.1484375 MHz
Conversion gain	-1 to +4 dB (nominal) plus RF frequency response
Bandwidth	
Low band	
– IF Path $\leq$ 160 MHz	Up to 160 MHz (nominal)
– IF Path 255 MHz	Up to 255 MHz (nominal)
– IF Path 510 MHz	Up to 510 MHz (nominal)
High band, with preselector	Depends on center frequency
High band, with preselector bypassed <sup>1</sup>	Up to 700 MHz (nominal); expandable to 900 MHz with corrections
<b>Programmable IF output, Option CRP</b>	
Center frequency	
– Range	10 to 75 MHz (user selectable)
– Resolution	0.5 MHz
Conversion gain	-1 to +4 dB (nominal) plus RF frequency response
Bandwidth	
Output at 70 MHz	
– Low band or high band with preselector bypassed	100 MHz (nominal)
– Preselected band	Depends on RF center frequency
Lower output frequencies	Subject to folding
Residual output signals	$\leq$ -88 dBm (nominal)

1. The maximum bandwidth is not centered around the IF output center frequency.

## Other Optional Output

### Option ALV Log video out

General port specifications		
Connector	SMA female	Shared with other options
Impedance		50 $\Omega$ nominal
Fast log video output		
Output voltage	Open-circuit voltages shown	
– Maximum	1.6 V at –10 dBm nominal	
– Slope	25 $\pm$ 1 mV/dB nominal	
Log fidelity		
– Range	49 dB (nominal) with input frequency at 1 GHz	
– Accuracy within range	$\pm$ 1.0 dB nominal	
Rise time	15 ns nominal	
Fall time		
– Bands 1-4 with Option MPB	40 ns nominal best case	
– Other cases	Depends on bandwidth	

### Option YAV Y-Axis output

General port specifications		
Connector	BNC female	Shared with other options
Impedance		50 $\Omega$ nominal
Screen video		
Operating conditions		
– Display scale types	Log or Lin	“Lin” is linear in voltage
– Log scales	All (0.1 to 20 dB/div)	
– Modes	Spectrum analyzer only	
– Gating	Gating must be off	
Output scaling	0 to 1.0 V open circuit, representing bottom to top of screen	
– Offset	$\pm$ 1% of full scale nominal	
– Gain accuracy	$\pm$ 1% of output voltage nominal	
Delay between RF input to analog output	71.7 $\mu$ s + 2.56/RBW + 0.159/VBW nominal	
Log video (Log envelope) output		
Amplitude range (terminated with 50 $\Omega$ )		
Maximum	1.0 V nominal for –10 dBm at the mixer	
Scale factor	1 V per 192.66 dB	
Bandwidth	Set by RBW	
Operating conditions	Select Sweep Type = Swept	
Linear video (AM Demod) output		
Amplitude range (terminated with 50 $\Omega$ )		
Maximum	1.0 V nominal for signal envelope at the reference level	
Minimum	0 V	
Scale factor	If carrier level is set to half the reference level in volts, the scale factor is 200% of carrier level per volt. Regardless of the carrier level, the scale factor is 100% of reference level per volt.	
Bandwidth	Set by RBW	
Operating conditions	Select Sweep Type = Swept	

# I/Q Analyzer

## Frequency

### Frequency span

– Option B25 (standard)	10 Hz to 25 MHz
– Option B40	10 Hz to 40 MHz
– Option B85	10 Hz to 85 MHz
– Option B1X	10 Hz to 160 MHz
– Option B2X	10 Hz to 255 MHz
– Option B5X	10 Hz to 510 MHz

## Resolution bandwidth (spectrum measurement)

### Range

– Overall	100 mHz to 3 MHz
– Span = 1 MHz	50 Hz to 3 MHz
– Span = 10 kHz	1 Hz to 10 kHz
– Span = 100 Hz	100 mHz to 100 Hz
– Window shapes	Flat Top, Uniform, Hanning, Hamming, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB)

## Analysis bandwidth (waveform measurement)

Option B25 (standard)	10 Hz to 25 MHz
Option B40	10 Hz to 40 MHz
Option B85	10 Hz to 85 MHz
Option B1X	10 Hz to 160 MHz
Option B2X	10 Hz to 255 MHz
Option B5X	10 Hz to 510 MHz

## IF frequency response (standard 10 MHz IF path)

### IF frequency response (demodulation and FFT response relative to the center frequency)

Freq (GHz)	Analysis BW (MHz)	Max error	Midwidth error (95th percentile)	Slope (dB/MHz) (95th percentile)	RMS (nominal)
≤ 3.6	≤ 10	± 0.20 dB	± 0.12 dB	± 0.10 dB	0.02 dB
3.6 to 26.5	≤ 10 preselected				0.23 dB
3.6 to 26.5	≤ 10 preselector off <sup>1</sup>	± 0.25 dB	± 0.12 dB	± 0.10 dB	0.02 dB
26.5 to 50	≤ 10 preselected				0.12 dB
26.5 to 50	≤ 10 preselected off <sup>1</sup>	± 0.30 dB	± 0.12 dB	± 0.10 dB	0.024 dB

1. Option MPB is installed and enabled.

## I/Q Analyzer (Continued)

IF phase linearity			Peak-to-peak (nominal)		RMS (nominal)	
Center freq (GHz)	Span (MHz)	Preselector	Std LO	DDS LO	Std LO	DDS LO
– $\geq 0.02$ , $< 3.6$	$\leq 10$	NA	0.06°	0.17°	0.012°	0.037°
– $\geq 3.6$	$\leq 10$	Off <sup>1</sup>	0.10°	0.31°	0.022°	0.067°
– $\geq 3.6$	$\leq 10$	On	0.11°	0.83°	0.024°	0.170°
Dynamic range (standard 10 MHz IF path)						
Clipping-to-noise dynamic range	Excluding residuals and spurious responses					
Clipping level at mixer	Center frequency	$\geq 20$ MHz				
– IF gain = Low	–10 dBm	–8 dBm nominal				
– IF gain = High	–20 dBm	–17.5 dBm nominal				
Noise density at mixer at center frequency	(DANL + IF Gain effect) + 2.25 dB					
Data acquisition (standard 10 MHz IF path)						
Time record length						
Analysis tool						
IQ analyzer	4,999,999 IQ sample pairs	Waveform measurement				
Advanced tools	Data packing	89600 VSA software or fast capture				
	32-bit	64-bit				
Length (IQ sample pairs)	536 MSa (2 <sup>29</sup> Sa)	268 MSa (2 <sup>28</sup> Sa)	2 GB total memory			
Length (time units)	Samples/Sample rate (IQ pair)					
Sample rate						
IQ pairs	Span x 1.25					
ADC resolution	16 bits					

1. Option MPB is installed and enabled.

## I/Q Analyzer (Continued)

<b>IF frequency response (standard 25 MHz IF path)</b>						
<b>IF frequency response (demodulation and FFT response relative to the center frequency)</b>						
Freq (GHz)	Analysis BW (MHz)	Max error	Midwidth error (95th percentile)	Slope (dB/MHz) (95th percentile)	RMS (nominal)	
- < 3.6	10 to ≤ 25	± 0.30 dB	± 0.12 dB	± 0.10 dB	0.05 dB	
- 3.6 to 26.5	10 to ≤ 25 preselected				0.50 dB	
- 3.6 to 26.5	10 to ≤ 25 preselector off <sup>1</sup>	± 0.40 dB	± 0.12 dB	± 0.10 dB	0.04 dB	
- 26.5 to 50	10 to ≤ 25 preselected				0.31 dB	
- 26.5 to 50	10 to ≤ 25 preselector off <sup>1</sup>	± 0.40 dB			0.02 dB	
<b>IF phase linearity</b>						
Center freq (GHz)	Span (MHz)	Preselector	Peak-to-peak (nominal)		RMS (nominal)	
			Std LO	DDS LO	Std LO	DDS LO
- ≥ 0.02, < 3.6	≤ 25	NA	0.48°	0.47°	0.12°	0.12°
- ≥ 3.6	≤ 25	Off <sup>1</sup>	0.85°	1.1°	0.20°	0.28°
<b>Dynamic range (standard 25 MHz IF path)</b>						
Full scale (ADC clipping)						
Default settings, signal at CF (IF gain = Low)						
- Band 0	-8 dBm mixer level nominal					
- Bands 1 through 4	-7 dBm mixer level nominal					
High gain setting, signal at CF (IF gain = High)						
- Band 0	-18 dBm mixer level nominal, subject to gain limitations					
- Bands 1 through 4	-17 dBm mixer level nominal, subject to gain limitations					
Effect of signal frequency ≠ CF	Up to ± 3 dB nominal					
<b>Data acquisition (standard 25 MHz IF path)</b>						
<b>Time record length</b>						
<b>Analysis tool</b>						
IQ analyzer	4,999,999 IQ sample pairs		Waveform measurement			
Advanced tools	Data packing		89600 VSA software or fast capture			
	32-bit	64-bit				
- Length (IQ sample pairs)	536 MSa (2 <sup>29</sup> Sa)	268 MSa (2 <sup>28</sup> Sa)	2 GB total memory			
- Length (time units)	Samples/Sample rate (IQ pair)					
<b>Sample rate</b>						
IQ pairs	Span x 1.25					
ADC resolution	16 bits					

1. Option MPB is installed and enabled.



## I/Q Analyzer (Continued)

Option B40 40 MHz analysis bandwidth (Option B40 is automatically included in Option B85, B1X, B2X, or B5X)

<b>IF frequency response (40 MHz IF path)</b>						
<b>IF frequency response (relative to center frequency)</b>						
Center freq. (GHz)	Span (MHz)	Preselector		Typical	RMS (nominal)	
- $\geq 0.03, < 3.6$	$\leq 40$	NA	$\pm 0.4$ dB	$\pm 0.25$ dB	0.05 dB	
- $\geq 3.6, \leq 8.4$	$\leq 40$	Off <sup>1</sup>	$\pm 0.4$ dB	$\pm 0.16$ dB	0.05 dB	
- $> 8.4, \leq 26.5$	$\leq 40$	Off <sup>1</sup>	$\pm 0.7$ dB	$\pm 0.20$ dB	0.05 dB	
- $\geq 26.5, < 34.4$	$\leq 40$	Off <sup>1</sup>	$\pm 0.8$ dB	$\pm 0.25$ dB	0.1 dB	
- $\geq 34.4, < 50$	$\leq 40$	Off <sup>1</sup>	$\pm 1.0$ dB	$\pm 0.35$ dB	0.1 dB	
<b>IF phase linearity (deviation from mean phase linearity)</b>						
Center freq (GHz)	Span (MHz)	Preselector	Peak-to-peak (nominal)		RMS (nominal)	
			Std LO	DDS LO	Std LO	DDS LO
- $\geq 0.03, < 3.6$	$\leq 40$	NA	0.16°	0.5°	0.041°	0.12°
- $\geq 3.6$	$\leq 40$	Off <sup>1</sup>	1.5°	1.24°	0.35°	0.32°
<b>EVM (EVM measurement floor for an 802.11g OFDM signal, using 89600 VSA software equalization, channel estimation and data EQ)</b>						
2.4 GHz	-52.0 dB (0.25%) nominal					
5.8 GHz with Option MPB	-49.1 dB (0.35%) nominal					
<b>Dynamic range (40 MHz IF path)</b>						
SFDR (Spurious-free dynamic range)						
Signal frequency within $\pm 12$ MHz of center	-80 dBc nominal					
Signal frequency anywhere within analysis BW						
Spurious response within $\pm 18$ MHz of center	-79 dBc nominal					
Response anywhere within analysis BW	-77 dBc nominal					
<b>Full scale (ADC clipping)</b>	<b>Mixer level (nominal)</b>					
Default setting, signal at CF (IF gain = Low: IF gain offset = 0 dB)	Std LO	DDS LO, RF/MW		DDS LO, mmW		
- Band 0	-8 dBm	-7 dBm		-8 dBm		
- Bands 1 through 4	-7 dBm	-5.5 dBm		-7 dBm		
- Bands 5 through 6	-7 dBm			-11 dBm		
High gain setting, signal at CF (IF gain = High)	Mixer level (nominal), subject to gain limitations					
- Band 0	-18 dBm	-13 dBm		-13 dBm		
- Bands 1 through 2	-17 dBm	-9 dBm		-17 dBm		
- Bands 3 through 4	-17 dBm	-4 dBm		-16 dBm		
- Bands 5 through 6	-17 dBm			-15 dBm		
Effect of signal frequency $\neq$ CF	Up to $\pm 3$ dB nominal					

1. Option MPB is installed and enabled.

## I/Q Analyzer (Continued)

### Option B40 40 MHz analysis bandwidth

Data acquisition (40 MHz IF path)			
Time record length			
Analysis tool			
IQ analyzer	4,999,999 IQ sample pairs	Waveform measurement	
Advanced tools	Data packing		89600 VSA software or fast capture
	32-bit	64-bit	
Length (IQ sample pairs)	536 MSa (2 <sup>29</sup> Sa)	268 MSa (2 <sup>28</sup> Sa)	2 GB total memory
Length (time units)	Samples/Sample rate (IQ pair)		
Sample rate			
IQ pairs	Span x 1.25		
ADC resolution	12 bits		

### Option B85 85 MHz or B1X 160 MHz analysis bandwidth

IF frequency response (85 or 160 MHz IF path)					
IF frequency response (relative to center frequency)					
Center freq. (GHz)	Span (MHz)	Preselector		Typical	RMS (nominal)
– ≥ 0.1, < 3.6	≤ 85	NA	± 0.6 dB	± 0.17 dB	0.05 dB
	≤ 140	NA	± 0.6 dB	± 0.25 dB	0.05 dB
	≤ 160	NA		± 0.2 dB (nom)	0.07 dB
– ≥ 3.6, ≤ 8.4	≤ 85	Off <sup>1</sup>	± 0.73 dB	± 0.2 dB	0.05 dB
	≤ 140	Off <sup>1</sup>	± 0.8 dB	± 0.35 dB	0.05 dB
	≤ 160	Off <sup>1</sup>		± 0.3 dB (nom)	0.07 dB
– > 8.4, ≤ 26.5	≤ 85	Off <sup>1</sup>	± 1.10 dB	± 0.50 dB	0.1 dB
	≤ 140	Off <sup>1</sup>	± 1.30 dB	± 0.75 dB	0.1 dB
	≤ 160	Off <sup>1</sup>		± 0.5 dB (nom)	0.12 dB
– ≥ 26.5, ≤ 50	≤ 85	Off <sup>1</sup>		± 0.45 dB	0.12 dB
	≤ 140	Off <sup>1</sup>	± 1.20 dB	± 0.65 dB	0.12 dB
IF phase linearity (deviation from mean phase linearity)					
Center freq (GHz)	Span (MHz)	Preselector		Peak-to-peak (nominal)	RMS (nominal)
≥ 0.03, < 3.6	≤ 140	NA		0.9°	0.20°
≥ 3.6	≤ 160	NA		1.7°	0.42°
	≤ 140	Off <sup>1</sup>		1.6°	0.39°
	≤ 160	Off <sup>1</sup>		2.8°	0.64°
EVM (EVM measurement floor) <b>Customized settings required, preselector bypassed (Option MPB) above Band 0</b>					
Case 1: 62.5 Msymbol/s, 16 QAM signal, RRC filter alpha of 0.2, non-equalized, with approximately 75 MHz occupied bandwidth					
– Band 0, 1.8 GHz	0.8% nominal				
– Band 1, 5.95 GHz	1.1% nominal				
Case 2: 104.167 Msymbol/s, 16 QAM signal, RRC filter alpha of 0.35, non-equalized, with approximately 140 MHz occupied bandwidth					
– Band 1, 5.95 GHz	3.0% nominal, (unequalized)		0.5% nominal, (equalized)		
– Band 2, 15.3 GHz	2.5% nominal, (unequalized)		0.6% nominal, (equalized)		
– Band 4, 26 GHz	3.5% nominal, (unequalized)		1.6% nominal, (equalized)		

1. Option MPB is installed and enabled.

## I/Q Analyzer (Continued)

### Option B85 85 MHz or B1X 160 MHz analysis bandwidth

<b>Dynamic range (85 or 160 MHz IF path)</b>			
SFDR (Spurious-free dynamic range)			
Signal frequency within $\pm 12$ MHz of center	-75 dBc nominal		
Signal frequency anywhere within analysis BW			
– Spurious response within $\pm 63$ MHz of center	-74 dBc nominal		
– Response anywhere within analysis BW	-72 dBc nominal		
<b>Full scale (ADC clipping)</b>			
Default settings, signal at CF (IF gain = Low: IF gain offset = 0 dB)			
– Band 0	-8 dBm mixer level nominal		
– Band 1 through 4	-7 dBm mixer level nominal		
High gain setting, signal at CF (IF gain = High)			
– Band 0	-18 dBm mixer level nominal, subject to gain limitations		
– Band 1 through 4	-17 dBm mixer level nominal, subject to gain limitations		
Effect of signal frequency $\neq$ CF	Up to $\pm 3$ dB nominal		
<b>Data acquisition (85 or 160 MHz IF path)</b>			
<b>Time record length</b>			
<b>Analysis tool</b>			
IQ analyzer	4,999,999 IQ sample pairs	Waveform measurement	
Advanced tools	Data packing		
	32-bit	64-bit	89600 VSA software or fast capture
– Length (IQ sample pairs)	536 MSa ( $2^{29}$ Sa)	268 MSa ( $2^{28}$ Sa)	2 GB total memory
– Length (IQ sample pairs)	1073 MSa ( $2^{30}$ Sa)	536 MSa ( $2^{29}$ Sa)	4 GB total memory (Option DP4)
– Length (time units)	Samples/Sample rate (IQ pair)		
<b>Sample rate</b>			
IQ pairs	Span x 1.25		
ADC resolution	14 bits		

## I/Q Analyzer (Continued)

Option B2X 255 MHz analysis bandwidth (Option B2X is automatically included with Option B5X)

<b>IF frequency response (255 MHz IF path)</b>					
Center Freq (GHz)	Span (MHz)	Preselector	Specification	Typical	RMS (nominal)
- $\geq 0.4, < 3.6$	$\leq 255$	NA	$\pm 0.75$ dB	$\pm 0.3$ dB	0.1 dB
- $> 3.6, \leq 8.4$	$\leq 255$	Off <sup>1</sup>	$\pm 0.85$ dB	$\pm 0.34$ dB	0.1 dB
- $> 8.4, \leq 26.5$	$\leq 255$	Off <sup>1</sup>		$\pm 0.6$ dB nominal	0.2 dB
- $> 26.5$	$\leq 255$	Off <sup>1</sup>		$\pm 0.8$ dB nominal	0.2 dB
<b>IF phase linearity (255 MHz IF path)</b>					
Center Freq (GHz)	Span (MHz)	Preselector		Pk-to-pk (nominal)	RMS (nominal)
- $\geq 0.4, < 3.6$	$\leq 255$	NA		3°	0.6°
- $\geq 3.6, < 26.5$	$\leq 255$	Off <sup>1</sup>		2°	0.5°
- $\geq 26.5$	$\leq 255$	Off <sup>1</sup>		4°	0.8°
<b>Dynamic range (255 MHz IF path)</b>					
Spurious-free dynamic range (SFDR) Anywhere within the analysis BW				-78 dBc nominal	
Full scale (ADC clipping)			Mixer level		
Default setting, signal at CF (IF gain = Low: IF gain offset = 0 dB)			RF/MW (Opt 508, 513, 526)	mmW (Opt 544, 550)	
- Band 0			+3 dBm nominal	+2 dBm nominal	
- Bands 1 through 2			+4 dBm nominal	-6 dBm nominal	
- Bands 3 through 4			+1 dBm nominal	-9 dBm nominal	
- Bands 5 through 6				-11 dBm nominal	
High gain setting, signal at CF (IF gain = High)			Mixer level, subject to gain limitations		
- Band 0			-4 dBm nominal	+2 dBm nominal	
- Bands 1 through 2			+2.5 dBm nominal	+3 dBm nominal	
- Bands 3 through 4			+1 dBm nominal	0 dBm nominal	
- Bands 5 through 6				-11 dBm nominal	
Effect of signal frequency $\neq$ CF			Up to $\pm 4$ dB nominal		
IF residual responses across the full BW					
- Band 0			Preselector off <sup>1</sup>	-110 dBFS nominal	
- Band 1				-108 dBFS nominal	
Third-order intermodulation distortion (Two tones of equal level, 1 MHz separation, each tone -23 dB relative to full scale (ADC clipping), IF gain = high)					
- Band 0				-85 dBc nominal	
- Bands 1 through 4			Preselector off <sup>1</sup>	-85 dBc nominal	
- Bands 5 through 6			Preselector off <sup>1</sup>	-80 dBc nominal	
Noise density					
Band	Frequency (GHz)		IF gain = Low	IF gain = High	
- 0	1.80		-144 dBm/Hz	-145 dBm/Hz	
- 1	6.00		-141 dBm/Hz	-141 dBm/Hz	
- 2	10.80		-140 dBm/Hz	-140 dBm/Hz	
- 3	15.15		-137 dBm/Hz	-137 dBm/Hz	
- 4	21.80		-135 dBm/Hz	-135 dBm/Hz	
- 5	30.50		-130 dBm/Hz	-130 dBm/Hz	
- 6	42.25		-130 dBm/Hz	-130 dBm/Hz	
<b>Data acquisition (255 MHz IF path)</b>					
<b>Time record length</b>					
IQ analyzer	4,999,999 IQ sample pairs		Waveform measurement		
Advanced tools	Data packing		89600 VSA or fast capture		
		32-bit	64-bit		
- Length (IQ sample pairs)	1073 MSa (230 Sa)	536 MSa (229 Sa)	4 GB total memory (Option DP4)		
Maximum IQ capture time (89600 VSA and fast capture)	Length of IQ sample pairs/sample rate (IQ pairs)				
Sample rate (IQ pairs)	Minimum of (1.25 x IFBW, 300 MSa/s)				
ADC resolution	14 bits				

# I/Q Analyzer (Continued)

## Option B5X 510 MHz analysis bandwidth

IF frequency response (510 MHz IF path)					
Center Freq (GHz)	Span (MHz)	Preselector	Specification	Typical	RMS (nominal)
- $\geq 0.6, < 3.6$	$\leq 500$	NA	$\pm 1.0$ dB	$\pm 0.41$ dB	0.06 dB
- $> 3.6, \leq 8.4$	$\leq 500$	Off <sup>1</sup>	$\pm 1.25$ dB	$\pm 0.42$ dB	0.3 dB
- $> 8.4, \leq 26.5$	$\leq 510$	Off <sup>1</sup>		$\pm 0.8$ dB nominal	
- $> 26.5$	$\leq 510$	Off <sup>1</sup>		$\pm 1.0$ dB nominal	
IF phase linearity (510 MHz IF path)					
Center Freq (GHz)	Span (MHz)	Preselector		Pk-to-pk (nominal)	RMS (nominal)
- $\geq 0.4, < 3.6$	$\leq 510$	NA		5°	1°
- $\geq 3.6, < 26.5$	$\leq 510$	Off		6°	1.4°
- $\geq 26.5$	$\leq 510$	Off <sup>1</sup>		7°	1.6°
Dynamic range (510 MHz IF path)					
Spurious-free dynamic range (SFDR)		-78 dBc nominal			
- Anywhere within the analysis BW					
Full scale (ADC clipping)			Mixer level		
Default setting, signal at CF (IF gain = Low: IF gain offset = 0 dB)			RF/MW (Opt 508, 513, 526)	mmW (Opt 544, 550)	
- Band 0			-3 dBm nominal		
- Bands 1 through 2			+2 dBm nominal	-9 dBm nominal	
- Bands 3 through 4			+3 dBm nominal	-13 dBm nominal	
- Bands 5 through 6			+1 dBm nominal	-11 dBm nominal	
High gain setting, signal at CF (IF gain = High)			Mixer level, subject to gain limitations		
- Band 0			-3.5 dBm nominal	+2 dBm nominal	
- Bands 1 through 2			-1 dBm nominal	+3 dBm nominal	
- Bands 3 through 4			+1 dBm nominal	0 dBm nominal	
- Bands 5 through 6			-11 dBm nominal		
Effect of signal frequency $\neq$ CF		Up to $\pm 4$ dB nominal			
F residual responses across the full BW					
- Band 0		Preselector off <sup>1</sup>	-104 dBFS nominal		
- Band 1			-103 dBFS nominal		
Third-order intermodulation distortion (Two tones of equal level, 1 MHz separation, each tone -23 dB relative to full scale (ADC clipping), IF gain = high)					
- Band 0					
- Bands 1 through 2		Preselector off <sup>1</sup>	-82 dBc nominal		
- Bands 3 through 4		Preselector off <sup>1</sup>	-80 dBc nominal		
- Bands 5 through 6		Preselector off <sup>1</sup>	-79 dBc nominal		
Noise density					
Band	Frequency (GHz)		IF gain = Low	IF gain = High	
- 0	1.80		-144 dBm/Hz	-144 dBm/Hz	
- 1	6.00		-140 dBm/Hz	-142 dBm/Hz	
- 2	10.80		-140 dBm/Hz	-141 dBm/Hz	
- 3	15.15		-137 dBm/Hz	-137 dBm/Hz	
- 4	21.80		-135 dBm/Hz	-135 dBm/Hz	
- 5	30.50		-130 dBm/Hz	-130 dBm/Hz	
- 6	42.25		-130 dBm/Hz	-130 dBm/Hz	
Data acquisition (510 MHz IF path)					
Time record length					
IQ analyzer		4,999,999 IQ sample pairs		Waveform measurement	
Advanced tools		Data packing		89600 VSA or fast capture	
		32-bit	64-bit		
- Length (IQ sample pairs)					
- IFBW $\leq 255.176$ MHz		1073 MSa (2 <sup>30</sup> Sa)	536 MSa (2 <sup>29</sup> Sa)	4 GB total memory (Option DP4)	
- IFBW $> 255.176$ MHz		2,147 MSa (2 <sup>31</sup> Sa)	1073 MSa (2 <sup>30</sup> Sa)	8 GB total memory (Option DP4)	
Maximum IQ capture time (89600 VSA and fast capture)		Length of IQ sample pairs/sample rate (IQ pairs)			
Sample rate (IQ pairs)					
- IFBW $\leq 255.176$ MHz		Minimum of (1.25 $\times$ IFBW, 300 MSa/s)			
- IFBW $> 255.176$ MHz		Minimum of (1.25 $\times$ IFBW, 600 MSa/s)			
ADC resolution		14 bits			

1. MPB (microwave preselector bypass) is enabled. All UXA ship with MPB as a standard feature.

# Real-time spectrum analyzer (RTSA) <sup>1</sup>

## Option RT1 or RT2

Real-time analysis		
Real-time analysis bandwidth		
- Option RT1	Up to 509.47 MHz	Analysis BW option determines the max real-time bandwidth
- Option RT2	Up to 509.47 MHz	Analysis BW option determines the max real-time bandwidth
- Option DUA	Up to 2 x 255 MHz at same center frequency	Requires Option B5X
Minimum detectable signal duration with > 60 dB		
- Option B85	11.42 ns	
- Option B1X	5.0 ns	
- Option B2X or B5X	3.33 ns	
Minimum signal duration with 100% probability of intercept (POI) at full amplitude accuracy		For Frequency Mask Triggering (FMT)
- Option RT1	17.3 $\mu$ s	Signal is at mask level
- Option RT2	3.57 $\mu$ s	Signal is at mask level
Minimum acquisition time	104 $\mu$ s	
FFT rate	292,969/s	

## Option RTS

Real-time I/Q data streaming <sup>3</sup>		
Output stream resolution	16-bit I + jQ	
IQ streaming bandwidth	Up to 255 MHz	
Electrical interface	LVDS	
Sample rate	Varies continuously based on RTSA span setting	
Max IQ streaming bandwidth and sample rate		
- B1X	160 MHz	200 Msamples/s
- B2X or B5X	255 MHz	300 Msamples/s
Supported data recorder	X-COM Systems IQC5255B	
- Capture time	< 3 hours at 255 MHz bandwidth	
- Data tagging	Event markers, IRIG-B GPS	

1. For additional RTSA specifications, please refer to Option RT1/RT2 Chapter in the PXA Signal Analyzer specifications guide.
2. StM = "Signal-to-Mask".
3. Use with X-COM Systems IQC5255B data recorder to capture rare events and play back at RF using integrated control software on the PXA.

## Related Literature

### Keysight PXA signal analyzers

Publication title	Publication number
<i>X-Series Signal Analyzers - Brochure</i>	5992-1316EN
<i>N9030B PXA X-Series Signal Analyzer, Multi-touch - Configuration Guide</i>	5992-1318EN

Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

